




# Kurio Xtreme Speaker Replacement

Replace your Kurio Xtreme's faulty speakers with new speakers.

Written By: Mallory Myers

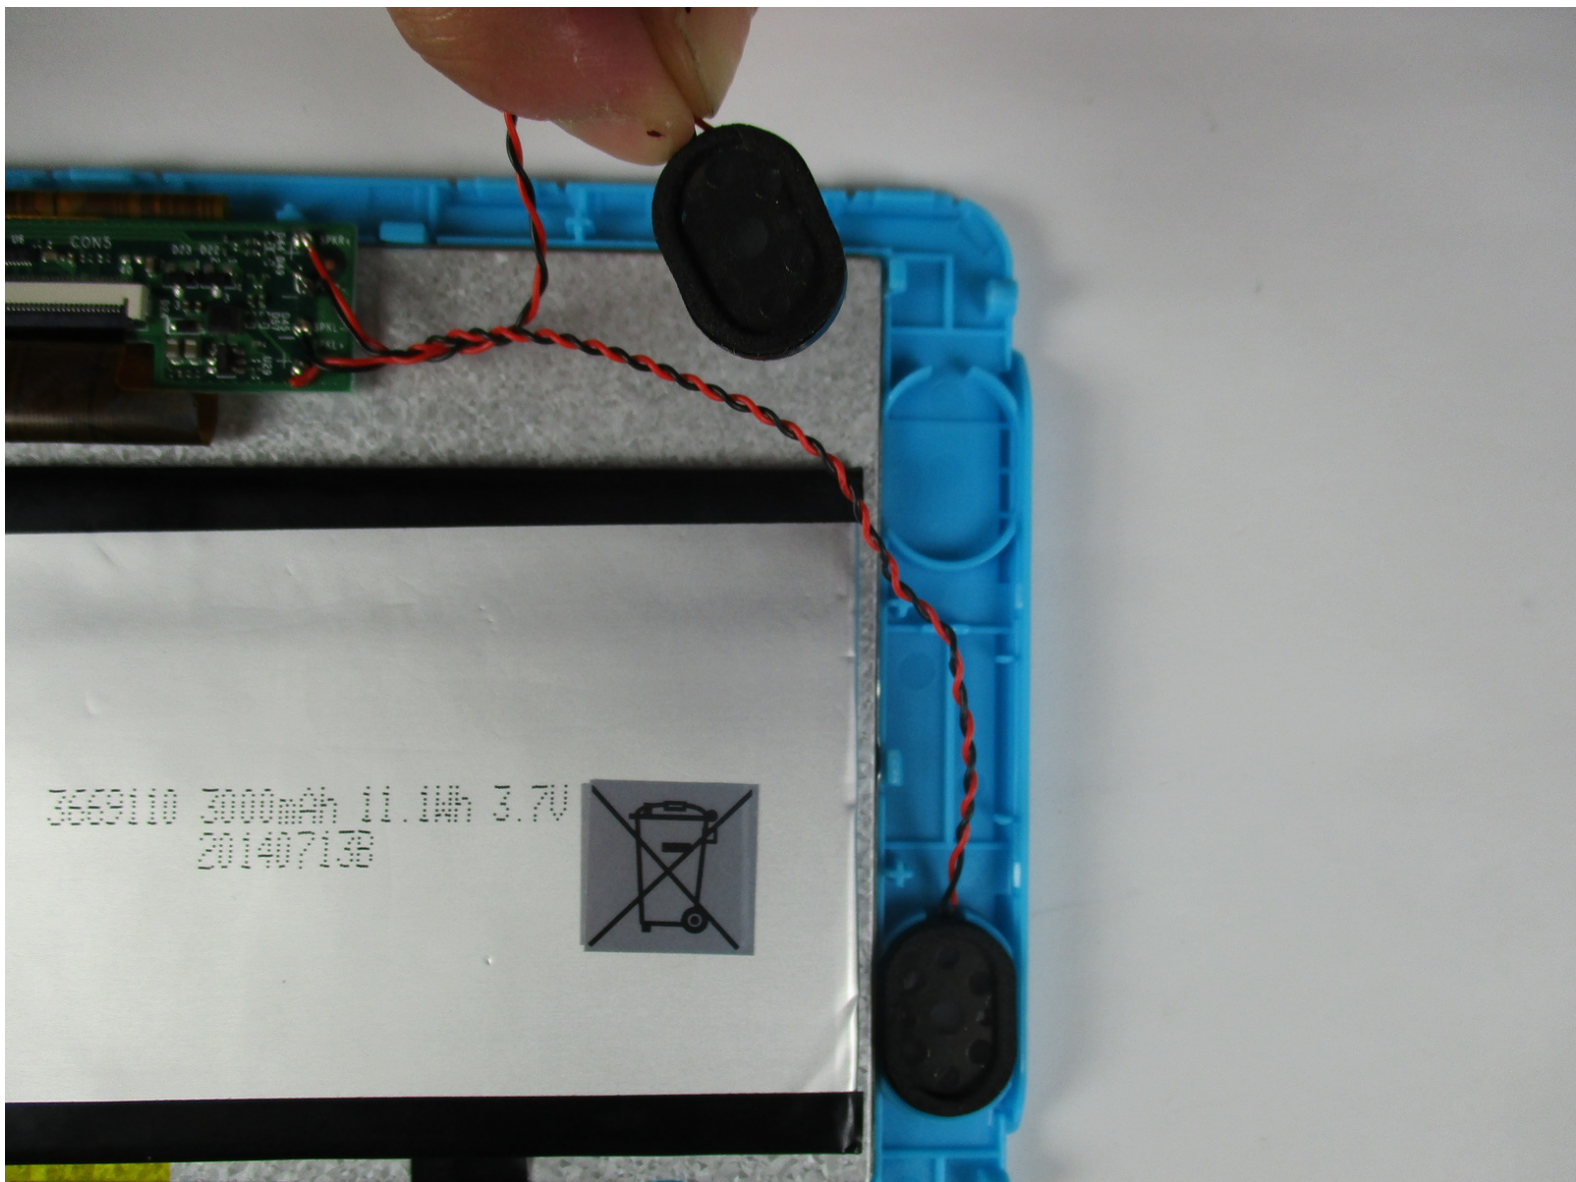

## INTRODUCTION

If your Kurio Xtreme's speakers are not working properly, follow these steps to replace the faulty speakers with new speakers. Before proceeding, make sure that you have a soldering iron and know how to use it.

---



### TOOLS:


- [Phillips #000 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Soldering Station](#) (1)
-

## Step 1 — Back Panel



- Remove the rubber case by beginning to peel from one of the top corners and continue peeling until the cover is completely removed.

## Step 2

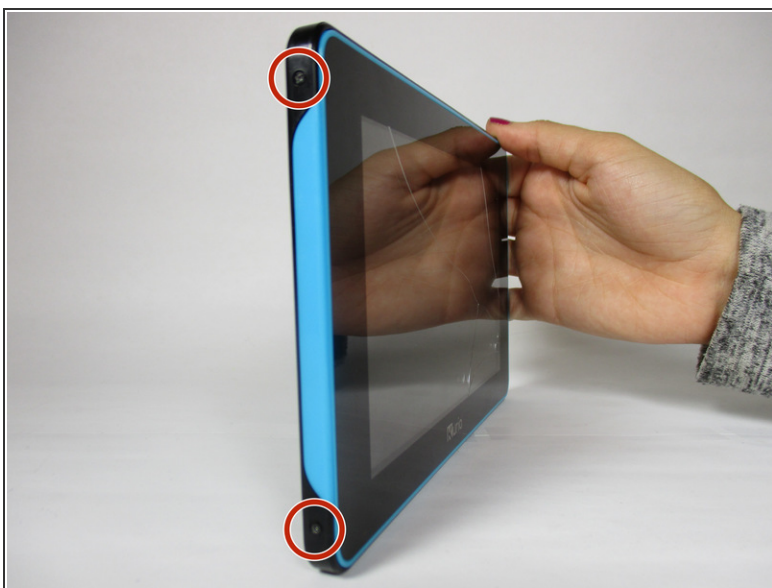

- Unscrew the four 4 mm black screws using a Phillips #000 screw driver.

 There are two screws on each side of the device (four total).




## Step 3




- Insert the plastic opening tool in between the edges of the blue front casing and black back casing.
- Slide the plastic opening tool around the perimeter of the device. This may require that you repeatedly run the opening tool up and down the edges of the device.
- ⚠ Be sure not to break any of the plastic clamps along the edges of the device when removing the back cover.
- Carefully lift the back panel off of the rest of the device.

## Step 4 — Speaker

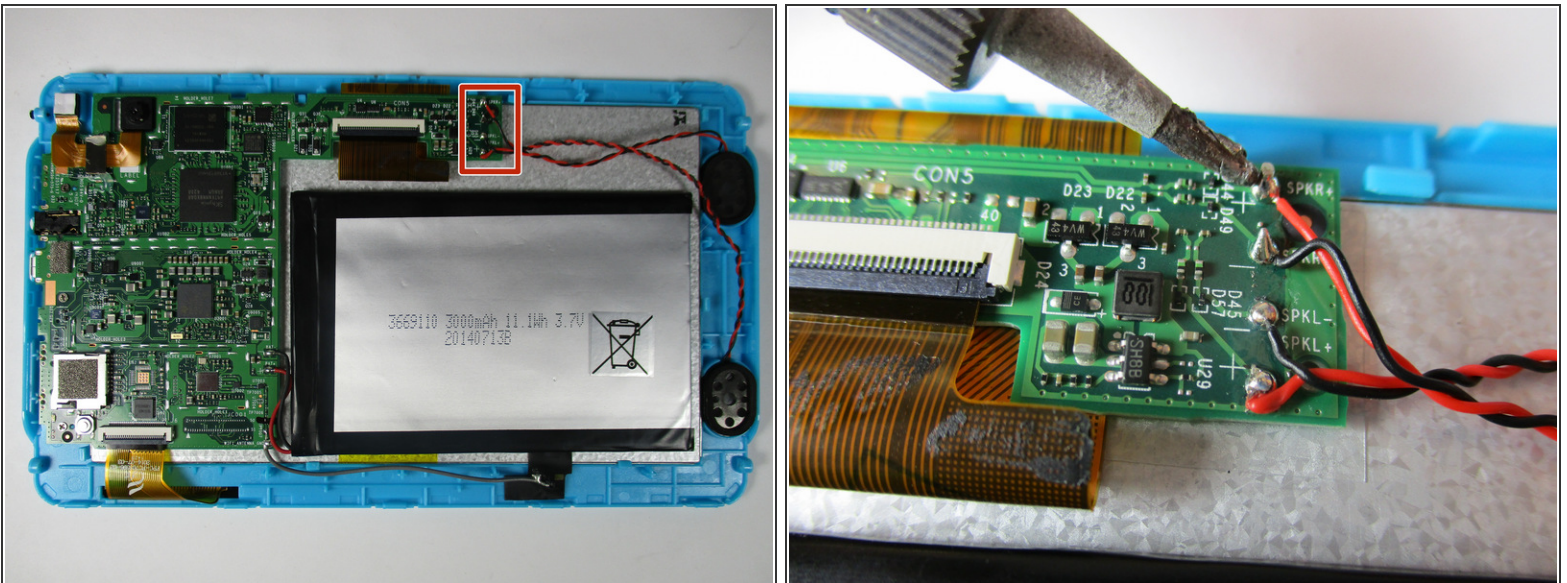

- Disconnect the 2 sets of black and red wires (4 wires total) from the motherboard by soldering the ends connected to the motherboard.
- ⚠ The soldering iron gets very hot and may injure you if exposed to your skin.

## Step 5

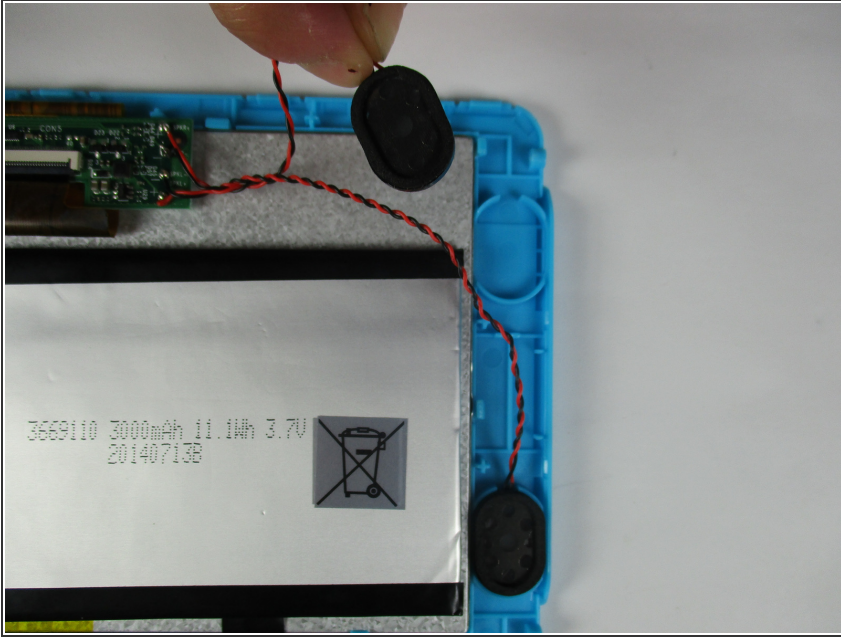

- Carefully remove the speakers out of the plastic molds by lifting up the black and red wires.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 11:49:30 PM.